

Shielded, SMD, Ferrite Power Inductors



FEATURES

- 8.0 mm x 8.0 mm x 4.2 mm max. SMD package
- Magnetically shielded construction due to iron-embedded epoxy encapsulation over wirewound ferrite core
- Inductance range: 0.82 μH to 470 μH
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

LINKS TO ADDITIONAL RESOURCES



Product Page

APPLICATIONS

- DC/DC power supplies
- Noise suppression and filtering
- Computer, industrial, consumer electronics

STANDARD ELECTRICAL SPECIFICATIONS

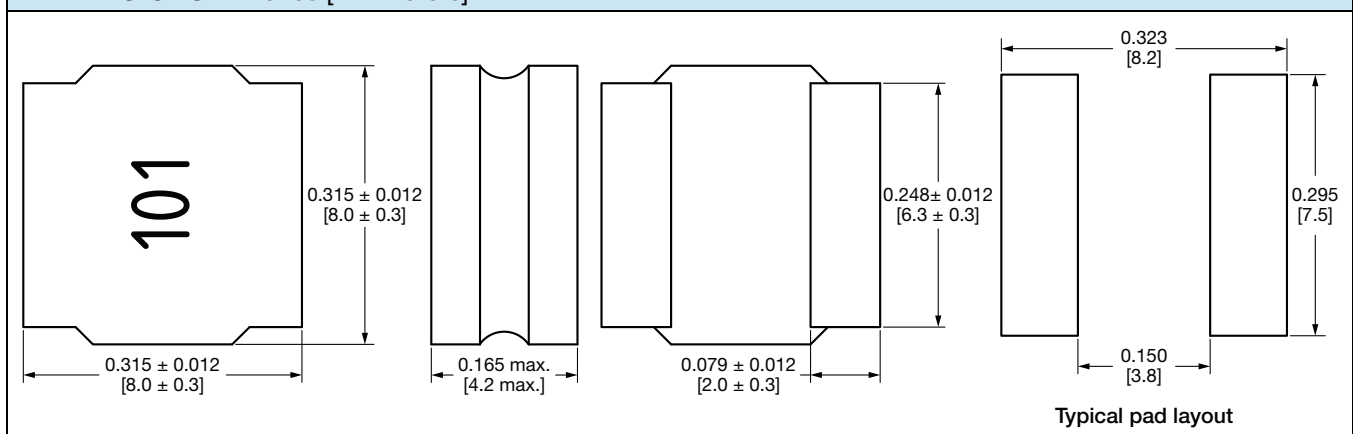
PART NUMBER	L_0 INDUCTANCE (μH)	INDUCTANCE TOLERANCE (%)	DCR TYP. 25 °C (m Ω)	DCR MAX. 25 °C (m Ω)	HEAT RATING CURRENT DC TYP. I_{DC} (A) ⁽¹⁾	SATURATION CURRENT DC TYP. I_{SAT} (A) ⁽²⁾	SRF MIN. (MHz)
IFSC3232DBERR82N02	0.82	30.0	8	10	6.9	16	94
IFSC3232DBER1R0N02	1	30.0	8	10	6.9	14	89
IFSC3232DBER1R2N02	1.2	30.0	10	13	6.2	14	59
IFSC3232DBER1R5N02	1.5	30.0	10	13	6.2	11	67
IFSC3232DBER2R0N02	2	30.0	12	16	5.6	10	43
IFSC3232DBER2R2N02	2.2	30.0	12	16	5.6	8	41
IFSC3232DBER3R0N02	3	30.0	14	18	5.2	7	32
IFSC3232DBER3R3N02	3.3	30.0	17	22	4.8	7	27
IFSC3232DBER3R6N02	3.6	30.0	17	22	4.8	8.5	30
IFSC3232DBER3R9N02	3.9	30.0	17	22	4.8	6.5	26
IFSC3232DBER4R7N02	4.7	30.0	19	25	4.5	6.5	24
IFSC3232DBER5R1N02	5.1	30.0	19	25	4.4	5.4	22
IFSC3232DBER5R6N02	5.6	30.0	21	27	4.2	6.9	24
IFSC3232DBER6R2N02	6.2	30.0	21	27	4.2	5.1	20
IFSC3232DBER6R8M02	6.8	20.0	24	31	4	5.2	20
IFSC3232DBER8R2M02	8.2	20.0	26	34	3.8	4.8	17
IFSC3232DBER100M02	10	20.0	29	38	3.6	4.1	15
IFSC3232DBER120M02	12	20.0	41	53	3	4	13
IFSC3232DBER150M02	15	20.0	47	61	2.8	3.4	12
IFSC3232DBER180M02	18	20.0	53	69	2.6	3.1	11
IFSC3232DBER220M02	22	20.0	69	90	2.3	2.7	9.5
IFSC3232DBER270M02	27	20.0	78	101	2.2	2.5	9.2
IFSC3232DBER330M02	33	20.0	97	126	2	2.4	7.8
IFSC3232DBER360M02	36	20.0	102	133	1.9	2.3	7.8
IFSC3232DBER390M02	39	20.0	107	139	1.9	2.2	7.8
IFSC3232DBER430M02	43	20.0	113	147	1.8	2.2	7.8
IFSC3232DBER470M02	47	20.0	136	177	1.7	2	6.4
IFSC3232DBER510M02	51	20.0	142	185	1.6	1.9	6.4
IFSC3232DBER560M02	56	20.0	148	192	1.6	1.7	6.4
IFSC3232DBER620M02	62	20.0	182	237	1.4	1.6	6.4
IFSC3232DBER680M02	68	20.0	196	255	1.4	1.6	4.9

STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	L ₀ INDUCTANCE (μH)	INDUCTANCE TOLERANCE (%)	DCR TYP. 25 °C (mΩ)	DCR MAX. 25 °C (mΩ)	HEAT RATING CURRENT DC TYP. I _{DC} (A) ⁽¹⁾	SATURATION CURRENT DC TYP. I _{SAT} (A) ⁽²⁾	SRF MIN. (MHz)
IFSC3232DBER750M02	75	20.0	211	274	1.3	1.5	4.9
IFSC3232DBER820M02	82	20.0	225	293	1.2	1.4	4.9
IFSC3232DBER910M02	91	20.0	272	354	1.1	1.3	4.9
IFSC3232DBER101M02	100	20.0	290	377	1.1	1.3	4.2
IFSC3232DBER121M02	120	20.0	334	434	1	1.1	3.5
IFSC3232DBER151M02	150	20.0	410	533	0.94	1.2	3.5
IFSC3232DBER181M02	180	20.0	520	676	0.92	1.15	3.5
IFSC3232DBER221M02	220	20.0	599	779	0.88	0.94	3.5
IFSC3232DBER331M02	330	20.0	889	1156	0.7	0.75	2.8
IFSC3232DBER471M02	470	20.0	1250	1625	0.6	0.7	2.1

Notes

- All test data is referenced to 25 °C ambient
 - Test condition: 100 kHz, 1 V
 - Operating temperature range -40 °C to +125 °C
- (1) DC current (A) that will cause an approximate ΔT of 40 °C
 (2) DC current (A) that will cause L₀ to drop approximately 30 %

DIMENSIONS in inches [millimeters]

DESCRIPTION

IFSC3232DB-02	100 μH	± 20 %	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC® LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I F S C	3 2 3 2 D B	E R	1 0 1	M	0 2
PRODUCT FAMILY	SIZE	PACKAGE CODE	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	SERIES
		ER = tape and reel	101 = 100 μH	M = ± 20 % N = ± 30 %	



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.